File ref - s:\11 non core services\co00208041 better buses broad st\cad\work area\1 live drgs\traffic design\co00208041_revc.dwg

Canal Basin

SHEFFIELD PARKWAY

CRICKET INN ROAD

BROAD STREET

BERNARD STREET

NEW STREET LANE

STEPNEY STREET

OLD STREET

The Pinnacles

St John's Church

Park Gardeners

The Gateway

Towing Path

El Sub Sta

Subway

Ward Bdy

PH

Link Row

Rubens Row

Bernard High P

Path

Temp sign & post extension to be removed on instruction of Sheffield CC

Traffic camera enforcement starts 15 June

Traffic enforcement cameras

525974
Erect signs on 120 x 60 post 1200 planting depth 4455 Post length & 900mm post extension

No loading Mon - Fri 7.30 - 9.30 am 4.00 - 6.30 pm

525973
Erect sign on L/C

525972
Erect sign on new 60mm post 600mm planting depth 3110 post length

525971
Erect sign on new 60mm post 600mm planting depth 3275 post length

Mon - Sat 8 am - 6.30 pm

525970
Remove existing WR sign and erect new sign

525969
Erect sign on L/C

525968
Erect sign on L/C

525967
Erect sign on L/C

525966
Erect sign on L/C

525965
Erect sign on L/C

525964
Remove existing WR sign and erect new sign on L/C

525963
Erect sign on L/C

525962
Erect signs on 120 x 60 post 1200 planting depth 4455 Post length & 900mm post extension

REM1
Remove redundant post (76mm)

525961
Erect sign on L/C

525960
Remove existing WR sign from post and erect new sign

517375
Fit 250mm post extension (100x50) Move ex. bus lane sign to top of posts and erect new sign below

525959
Remove existing WR sign from L\C and erect new sign

authorised vehicles taxi Mon - Fri 7.30 - 9.30 am 4.00 - 6.30 pm

525958
Erect sign on L/C

525957
Erect sign on new 60mm post 600mm planting depth 3110 post length

525956
Erect sign on L/C

525955
Erect sign on new 60mm post 600mm planting depth 3110 post length

525954
Erect sign on new 60mm post 600mm planting depth 3275 post length

525953
Transfer sign to L/C

No stopping except local buses

REM2
Remove old WR sign and post (76mm)

Make dashed BUS LANE line solid

Remove DYL under the zig-zags, refresh zig-zags & provide end bars

Remove BUS STOP bay & accociated markings

525952
Erect sign on L/C

525951
Fit 350mm post extension (89mm) Move ex. Controlled Zone sign to top of postsand erect new sign below

Controlled ZONE 8 am - 8.30 pm

525950
Erect sign on guardrail

No loading at any time

Tie in to existing double yellows

517380
Fit 250mm post extension (100x50) Move ex. bus lane sign to top of posts and erect new sign below

Provide bus boarder
See standard detail
HD/1100/22/2C

517379
Fit 250mm post extension (100x50) Move existing bus lane sign to top of posts and erect new sign below

See drawing TR-Co00208041-002 for sign face details

Notes:-

1.Sheffield CC to arrange with SYPTE for Bus Stop flag sign and information board to be relocated from existing to new bus stop location

2.All signs to be erected at 2300mm clearance unless otherwise stated

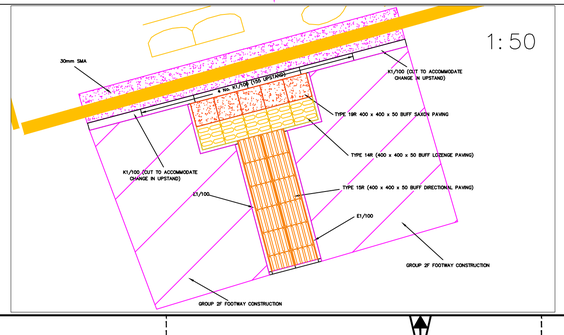

Road Markings Key

- WL/1001.3
- WL/1049/250
- WL/1014/4500
- YL/1017/75
- YL/1018.1/75
- YL/1019/100
- YL/1020.1/100
- BUS STOP — WL/1025.1/200
- BUS LANE — WL/1048/1600
- WL/1049/250
- WL/1050/5550

Markings in **black** or **orange** (new or to be refreshed)

Markings in grey (existing to remain)

Markings in **red** to be removed

Rev	Revision details	Chkd	Appd	Date
C	Ammended pos. S/R 525962	SMW	HS	10/6/13
B	Addition of Bus Boarder	SMW	DP	31/5/13
A	Amended schedule numbers	HJ	HS	20/5/13

Drawn:	TZ	Preliminary	
Design:	TZ	For comment	
Chkd:	HJ	For tender	
Appd:	HS	For construction	✓
Date:	16/5/2013	As constructed	
		Other	

Client: amey working with Sheffield City Council

Project Name
Traffic Enforcement Cameras NCNW0103/DS028

Drawing Title
Broad Street/Cricket Inn Road Signing & Lining Details, and relocation of bus stop

Original Drawing Size : A1	Dimensions : -
Scale : 1:500	Copyright © Amey

Drawing No: TR-Co00208041-001

Rev: C